



# ROLLIO XPRESS

Most economic solution of 13" professional digital roll label 4 color press in the market for prevelance! WIDE RANGE OF COMPATIBLE SUBSTRATE / 7.26M/MIN SPEED @ 1200x2400 DPI / FREE WIDTH BTW 210-330MM



## **FEATURES**

## Practical digital label press for quick and short runs



#### **INTUITIVE S/W**

Simultaneous processing of several orders. Advanced features like color control and calculation of costs. Option for professional rip, ICC profiler and variable data available.



### PERFECT QUALITY

The special IRecT technology corrects a imprecise print image alignment with highest precision and avoids quality poblems in printing.




## WIDE RANGE OF MEDIA

BIZPRESS can also print on heat sensitive materials like Thermopapers, PE, PVC, PP, TYVEK and on static sensitive materials like gold paper and silver film.




## COMPACT SIZE

The label printer available for attractive price. Ideal for small and medium orders. Small footprint and therefore also suitable for office environments.




## 1200 x 2400 DPI

The best quality in LED toner systems by applying the most advanced S-LED and DELCIS technologies onto each of 14.592 LEDs.



## **IH-FUSER TECHNOLOGY**

Thanks to this new highly efficient fusing technology, it operates at low temperature without need of preheating.



#### **EA ECO-TONER**

Special toner containing low-temp. sharpmelting polyester and wax for photo-quality glossy output in strong bonding power.



## PACKAGING FILM PRINTING

BIZPRESS can print on thin BOPP films, aluminium deposited pouches or thin glassine papers for bread wrapping without wrinkles.












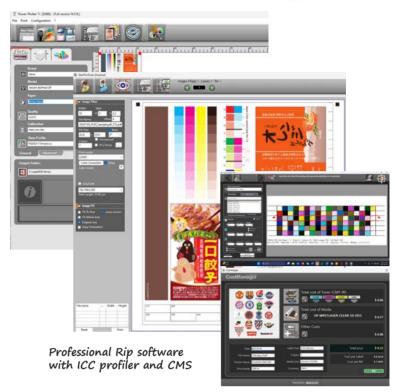

SPECIFICATIONS	
Max. media roll diameter	450mm (about 1,000 meters of artpaper label roll, 47.2 KG)
Roll media width	210-320mm
Max. printing width	304mm
Max. print image length	1200mm
Printing speed	7.26m/min at all resolutions (600x600, 1200x1200, 1200x2400 dpi)
Printing Technology	4 color (CMYK or CMYW) dry toner LED printing system
Warming up time	less than 28 seconds
Gap between repeats	min. 2mm
Compatible substrate	50~300micron / Paper, PET, PP, Tyvek, Aluminum composite film, Metalic paper, PE
Consumable Capacity	Toner : CMY 18.5K / K 26K, Drum : 100K (A4 pages @ 5% coverage)
Monthly cycle	Max. 20K sqm (recommended)
Printing Environment	20~23°C, 45~55% (RH)
Machine size (L x W x H)	1400 x 855 x 1400mm
Machine weigth	Approx. 423 kgs
Power supply	110-127 or 220-240 VAC, 50-60HZ, 2800WATTS
Included	LPU SW, anti-static ionizer, color sensor for overprinting, air cooling system, pneumatic bobbin, electro-magnetic tension control system
Warranty	13 month after shipment (except for consumables parts)
Options	Web guide system / White conversion kit / Professional RIP software / Variable data



